
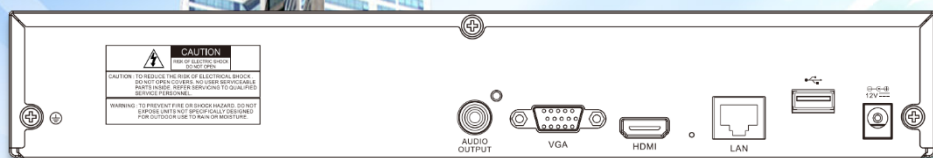


H.265+ 8MP/5MP/3MP/1080P/720P/960H

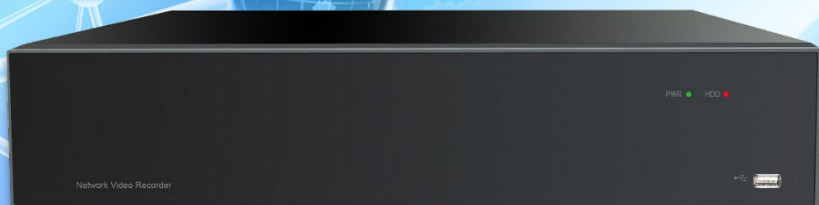

Feature :

- ❖ Support 8MP, 5MP, 3MP, 2MP(1080P), 1.3MP(960P), 1.0MP(720P).
- ❖ H.265+ / H.265 / H.264+ / H.264 compression.
- ❖ Support remote operation: Monitoring, PTZ Control, Playback, System Setting, File Download, Log Information.
- ❖ Support multiple AI functions: Face Detection, Pedestrian Detection, Vehicle Detection, Cross Counting, Heat Map, Crowd Density Detection, Perimeter Intrusion Detection and etc.
- ❖ Monitoring APP for mobile phone : Support : iPhone 、 iPad 、 Android etc.

ShineTech Electronics Co., Ltd.

Address: No. 169, Anji Street, Zuoying District, Kaohsiung City

Factory: 9th Floor, No. 93, Dashun 1st Road, Zuoying District, Kaohsiung City

TEL:886-7-5585859 FAX:886-7-5585860 Email:Shinotech@shinotech.com.tw

Model Name		SSV-NVR8008D
Bay		1*HDD/8TB
Recording Bandwidth	Input	76Mbps
	output	32Mbps
	IP Video Input	8ch
UI/Monitoring	Local	UI5.0
	WEB	IE10/11 Safari V12.1 above Firefox V.52 above Google chrome V.57 above Edge V.79 above
	Mobile viewer	Yes
	Push Notification	Yes
AI Function		Face Detection, Pedestrian Detection, Vehicle Detection, Cross Counting, Heat Map, Crowd Density Detection, Perimeter Intrusion Detection, Line Crossing Detection, Queue Length Detection, License Plate Detection, Rare Sound Detection
Interface		16bit True Color Graphic Menu Operation Interface
P/W Reset		Factory Reset : Press 10 seconds
Monitors	VGA	1CH, 1920*1080/1440*900/1280*1024/1280*720/1024*768
	HDMI	EDID/3840*2160/1920*1080/1440*900/1280*1024/1280*720/1024*768
	USB	USB2.0*1 (front)
		USB2.0*1 (rear)
	Network Port	RJ45*1, 100M Base-T
	PoE Port	N/A
	Audio	1CH out
	SATA HDD	1*10TB HDD
	RS485	N/A
	Alarm Input/out	N/A
Performance		
Recording and Playback	Compression	Audio: G.711A / G.711U
		Video : H.265 / H265+ / H.264 / H264+
	Display resolution	Main stream: Up to 3840*2160, Auxiliary Stream: D1
	Frame Rate	4K@30fps, 4MP@60fps, 2MP@120fps
	Event	MD(Zones: 1408 (44*32), Multi-level Sensitivity: level 1-8)
		Video loss
		Beep, Email, Push notification to Mobile APP
	Playback function	Fast forward / backward (2x, 4x, 8x,16x)
		Slow forward (1/2x, 1/4x, 1/8x,1/16x)

	Playback	Max 4CH playback
General		
OSD Language		Multiple Languages
Mechanical design	Dimension (W x D x H)	300 x 227 x 53mm
	Weight	2KG (Not including HDD)
Electrical	Power Supply	DC48V/2.25A
	Power consumption	< 12W (without HDD, without POE)
Environmental	Operating	Temperature: -10°C - +55°C
	Temperature/Humidity	Humidity: 10% - 95%
Certification		CE / FCC / RoHS